

## Interactive Flat Display



1

Ultra-narrow bezel, rounded corner design, anodized surface technology, showing the essence of business

2

55\", 65\", 75\" 86\" & 98\" LG HD 4K display, restore accurate color vision

3

Explosion-proof tempered surface

4

Smart conference whiteboard to meet different conference needs and with annotation software

5

Wireless screen transmission, multi-screen interaction, one-key projection, two-way control, to achieve content sharing between multiple terminals

6

Build-in meeting welcome module to support meeting registration.

7

Front sound outlet design, superb sound effects, showing theater-level audio-visual experience

## MAIN FUNCTIONS




### 1 FULL-FEATURED TYPE-C

Video transmission/Touch Output Sharing of storage devices such as Storage Drive

### 2 FULL 4K UI & 4K WRITING

4K writing is delicate and smooth. The writing style is more beautiful

2

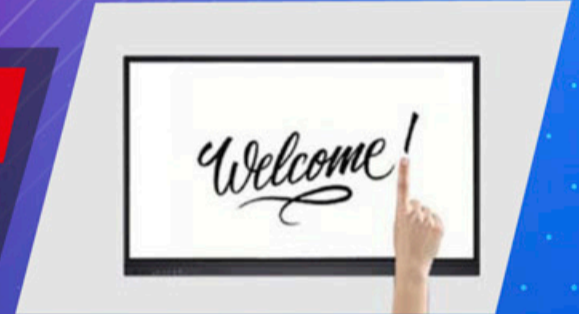

### 3 DUAL WHITEBOARD DISPLAY

The screen can start 2 whiteboard at the same time which able to operate separately and operate independently



### 4 MULTI SCREEN INTERACTION

Image can be transfer via wirelessly with sound

4



### 5 DUAL SYSTEM

The dual system is more powerful and switching between Android and Windows



### 5 MULTI-CHANNEL VIDEO HARD DECODING

It support up to 4 channels of 1080p video window hard decoding, which completely solves the problem of video conference running in the Android solution

5



Full-featured Type C



20 Points Touch Android & Windows OS



Android 11



4+32GB



Multi Screen Interaction



# SPECIFICATION

Model		DT-155HT	DT-165HT	DT-175HT	DT-186HT	DT-198HT
Display Parameter	Diagonal Size	55inch	65inch	75inch	86inch	98inch
	Effective Display Area	1209.6(H)*680.4(V)	1428.48(H)*803.52(V)	1650.24(H)*928.26(V)	1895.04(H)*1065.96(V)	2158.85(H)*1214.35(V)
	Display Ratio	16:9	16:9	16:9	16:9	16:9
	Brightness	300cd/m <sup>2</sup>	320cd/m <sup>2</sup>	350cd/m <sup>2</sup>	350cd/m <sup>2</sup>	350cd/m <sup>2</sup>
	Contrast Ratio	4000:1	4000:1	4000:1	4000:1	1200:1
	Backlight Type	DLED	DLED	DLED	DLED	DLED
	Viewing Angle	178°(V)/178°(H)	178°(V)/178°(H)	178°(V)/178°(H)	178°(V)/178°(H)	178°(V)/178°(H)
	Resolution	3840 (H) X 2160(V)	3840 (H) X 2160(V)	3840 (H) X 2160(V)	3840 (H) X 2160(V)	3840 (H) X 2160(V)
Audio Output Power	8Ω/10W*2	8Ω/10W*2	8Ω/10W*2	8Ω/10W*2	8Ω/10W*2	
Back Port	Input	LAN IN	1	1	1	1
		AV IN	1	1	1	1
		HDMI 2.0	2	2	2	2
		RS-232	1	1	1	1
		USB 3.0	1	1	1	1
		USB 2.0	1	1	1	1
	Out	TF-CARD	1	1	1	1
		AV OUT	1	1	1	1
		Earphone	1	1	1	1
		Coaxial (RCA)	1	1	1	1
		TOUCH OUT	1	1	1	1
		HDMI OUT	1	1	1	1
Front Port and Function	USB3.0	3	3	3	3	
	HDMI 2.0	1	1	1	1	
	USB TOUCH	1	1	1	1	
	Type-C Full Function	1	1	1	1	
	Recovery System	1	1	1	1	
	Light Sense	1	1	1	1	
Front Button	Power Button On/Off	1	1	1	1	
Android Specs	Android Frequency	Quad core ARM Cortex-A55	Quad core ARM Cortex-A55	Quad core ARM Cortex-A55	Quad core ARM Cortex-A55	Quad core ARM Cortex-A55
	System Version	Android 11	Android 11	Android 11	Android 11	Android 11
	DDR4 RAM	4G	4G	4G	4G	4G
	FLASH Memory	32G	32G	32G	32G	32G
	WIFI	2.4G/5G	2.4G/5G	2.4G/5G	2.4G/5G	2.4G/5G
Transmission Screen WIFI	5G	5G	5G	5G	5G	
Others	Power consumption of the whole machine (excluding OPS)	≤120W	≤160W	≤280W	≤380W	≤400W
	Standby Consumption	≤0.5W	≤0.5W	≤0.5W	≤0.5W	≤0.5W
	Lifetime	50000 hours	50000 hours	50000 hours	50000 hours	50000 hours
	Power Supply	100-240V, 50/60Hz	100-240V, 50/60Hz	100-240V, 50/60Hz	100-240V, 50/60Hz	100-240V, 50/60Hz
	Demission	1267.8*789.9*93.44mm	1486*913.2*93.64mm	1717.4*1056.3*100.3mm	1962.2*1194.1*100.3mm	2220*1324*105.7mm
	VESA Hole Site	4-M8 hole site 400mm*400mm	4-M8 hole site 400mm*400mm	4-M8 hole site 600mm*400mm	4-M8 hole site 600mm*400mm	4-M8 hole site 900mm*600mm
	Net Weight	28kg	38kg	57kg	74.2kg	87.1kg
	Gross Weight	32.4kg	46kg	70kg	91kg	111kg
Package Size	1350*890*190mm	1600*1030*200mm	1855*1170*200mm	2095*1320*230mm	2358*1485*280mm	
Touch Screen	Touch Technology	Multiple Infrared scanning technology	Multiple Infrared scanning technology	Multiple Infrared scanning technology	Multiple Infrared scanning technology	Multiple Infrared scanning technology
	Touch Type	40 point touch	40 point touch	40 point touch	40 point touch	40 point touch
	Drive Mode	HID Free drive	HID Free drive	HID Free drive	HID Free drive	HID Free drive
	Writing Surface Material	3mm anti glare tempered glass	4mm anti glare tempered glass	4mm anti glare tempered glass	4mm anti glare tempered glass	4mm anti glare tempered glass
	Touch Screen Sensor Mode	Finger, writing pen, hand with gloves or other non transparent touch sensitive medium	Finger, writing pen, hand with gloves or other non transparent touch sensitive medium	Finger, writing pen, hand with gloves or other non transparent touch sensitive medium	Finger, writing pen, hand with gloves or other non transparent touch sensitive medium	Finger, writing pen, hand with gloves or other non transparent touch sensitive medium
	Resolution of Touch Screen	32768X32768	32768X32768	32768X32768	32768X32768	32768X32768
	Communication Port	USB 2.0	USB 2.0	USB 2.0	USB 2.0	USB 2.0
	Minimum Recognition Point Size	2.5mm	2.5mm	2.5mm	2.5mm	2.5mm
	Response Time (SingleTouch)	≤5ms	≤8ms	≤8ms	≤8ms	≤8ms
	Touch Accuracy	±1mm	±1mm	±1mm	±1mm	±1mm
	Anti-Interference	Incandescent lamp (220V, 100W), vertical distance 350mm above, The illumination intensity of the sun is up to 80000Lux	Incandescent lamp (220V, 100W), vertical distance 350mm above, The illumination intensity of the sun is up to 80000Lux	Incandescent lamp (220V, 100W), vertical distance 350mm above, The illumination intensity of the sun is up to 80000Lux	Incandescent lamp (220V, 100W), vertical distance 350mm above, The illumination intensity of the sun is up to 80000Lux	Incandescent lamp (220V, 100W), vertical distance 350mm above, The illumination intensity of the sun is up to 80000Lux
	Calibration	Calibration free	Calibration free	Calibration free	Calibration free	Calibration free
Touch Time	More than 60 million times in the same position	More than 60 million times in the same position	More than 60 million times in the same position	More than 60 million times in the same position	More than 60 million times in the same position	
Touch Power Supply Mode	USB 5.0V power supply	USB 5.0V power supply	USB 5.0V power supply	USB 5.0V power supply	USB 5.0V power supply	
Accessories	Wall-Mount	1pcs	1pcs	1pcs	1pcs	1pcs
	Pen	1pcs	1pcs	1pcs	1pcs	1pcs
	Power Cable	1pcs	1pcs	1pcs	1pcs	1pcs
	Remote Control	1pcs	1pcs	1pcs	1pcs	1pcs
PC (Optional)	PC Option	H81/H110/H310 Mainboard	H81/H110/H310 Mainboard	H81/H110/H310 Mainboard	H81/H110/H310 Mainboard	H81/H110/H310 Mainboard
	Input Volage	18V DC	18V DC	18V DC	18V DC	18V DC
	Rated Output Current	5A	5A	6A	6A	6A
	Peak Output Current	6A	6A	8A	8A	8A
	Rated Load Power	90W	90W	108W	108W	108W
	Interface	Conform to Intel® OPS-C JAE 80-pin connector				
National Standard OPS Size	L194.6*W179.8*H42mm ( 42mm or 30mm )					
European Standard OPS Size	L180*W119*H30mm					

Specifications subject to change without notice. All other trademarks are the property of their respective trademark owners. ©2022 EIKI International Sdn Bhd



**EIKI INTERNATIONAL SDN BHD** (985903-M)

E-01-03 (Block E), Sekitar 26 Enterprise, Persiaran Hulu Selangor, Seksyen 26, 40400 Shah Alam, Selangor Darul Ehsan, Malaysia

✉ sales@eiki.my

