

EB78X Interactive Smart Frame



EIKI infrared touch frame is waterproof and maintenance free with highest transparency. The preferred solution for application, reliability and clarity. The infrared technology is available for standard size of 55" and large size panel solutions up to 98".

1

Ultra narrow design ,Infrared PCB board width reach 1.18 cm, widely used Optimize the amplification circuit design, building a large number of components to use, making the product reliability higher and stronger.

Use embedded infrared strip installation design, better fit with the frame, imperceptible sealing

2


3

Greatly enhance the performance of dustproof and waterproof, Reduce the use influence of water mist and dust Integrates board self-developed high speed infrared touch technology, producing powerful multi-point interaction effects.

Convenient for the teacher to carry out multimedia teaching easily, enriching the method, expanding it.

4

TOUCH INTERACTIVITY FOR LESS
 16:10 and 4:3 aspect ratio with touch-driven interactivity to engage multiple students for less!

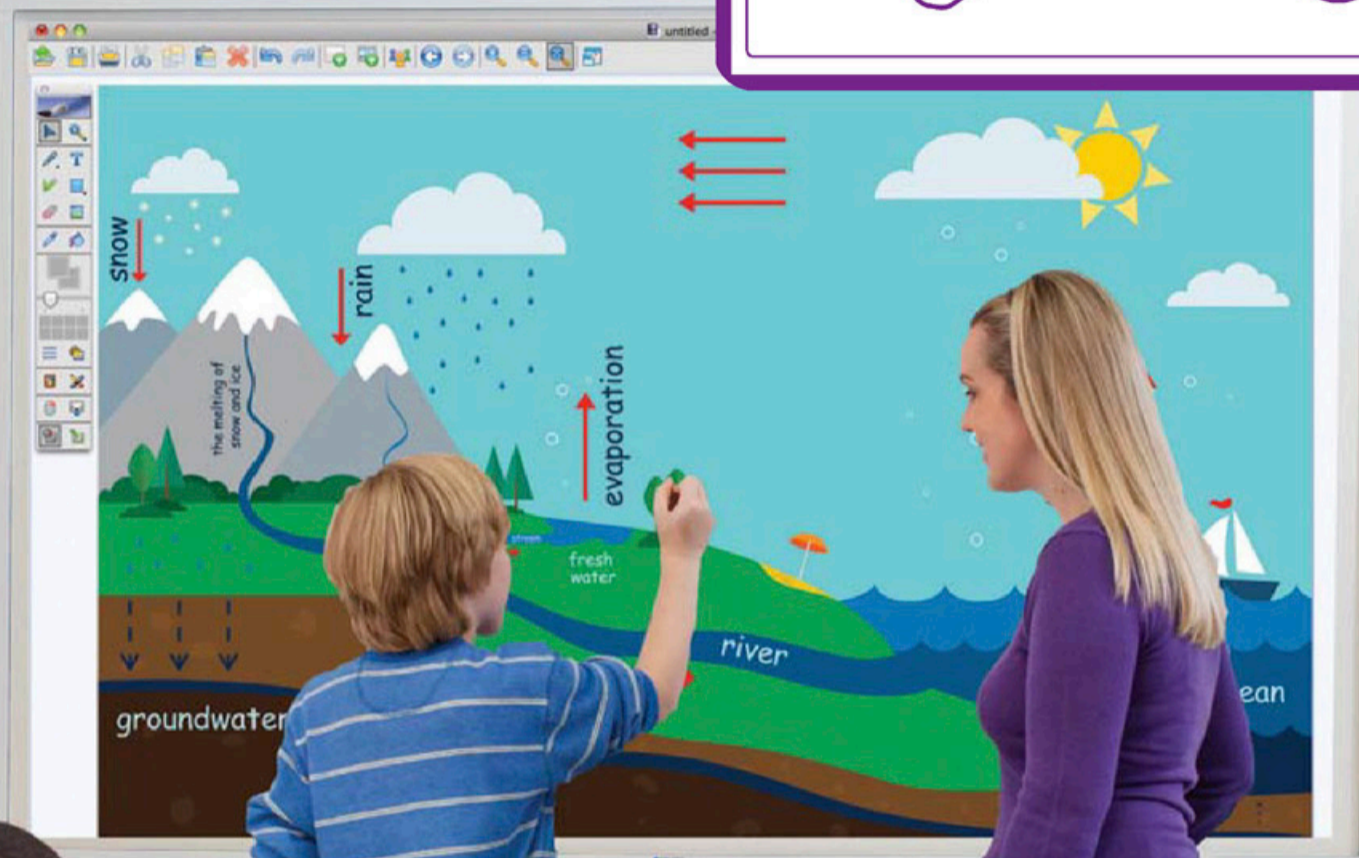

SPECIFICATION

Model	EB78X	Operating System	All Windows, Linux, Android, Mac 10.5 above
Touch Point	Touch point infrared 10 users writing touch	Identified Objective	Any opaque objects with diameter over 5mm
Resolution	Up to 4096x409	Operation Method	Plug and Play
Touch Accuracy	1.5mm	Power Consumption	<2W
Respond Speed	<20ms	Operating Current	<200mA
Input Method	Finger, gloved hand, or opaque object	Add-on	5m USB extension cable
Touch Time	Unlimited	Frame Size	80inch diagonal
Touch Object	5mm		

Specifications subject to change without notice. All other trademarks are the property of their respective trademark owners. ©2022 EIKI International Sdn Bhd

