




## **EIF86W** **86" Interactive Frame**

- 86" Interactive Smart Frame with multi-touch infrared sensor technology.
- Mount on top of existing display or projection screen to create an interactive touchscreen.
- Compatible with all brands of projectors and displays.
- Infrared touch technology accepts input from finger, pen or any opaque object.
- Ultra-narrow, waterproof and maintenance free design with high transparency.
- Supports multi-touch input and input size recognition.
- Connects to computer via USB for input and power.
- Frame can be used in landscape or portrait orientation.
- Simple solution to add touchscreen interactivity to classrooms and meeting rooms.

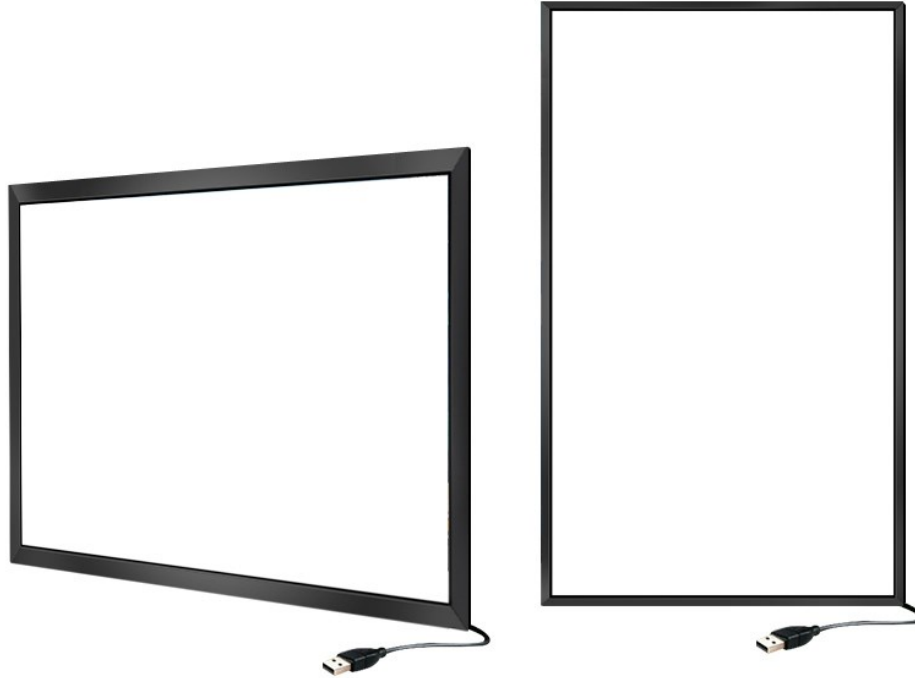

## • Specifications

Touch Screen Size	86" diagonal, 16:10 aspect ratio	Interface	USB 2.0 Full Speed
Luminous Transmission	≥92% with glass 100% without glass	Power Supply	USB
Touch Activation Force	No pressure required	Working Voltage	DC 5.0W±5%
Touch Technology	Infrared Sensor	Power Consumption	≤1.0W
Touch Resolution	32768 x 32768	Estimated LED Life	60,000 hours
Touch Response Time	Multi-Touch: 10-15ms Single Touch: 7ms	Software Specifications / Supported OS	Multi-Touch: Windows 7 or above, Android Single Touch: Windows XP, MacOS, Linux Firmware Updates: Windows 7 or above
Touch Size Recognition	Yes		
Min. Recognition Size	0.16 x 0.16" (4 x 4mm)	Operating Temperature	14-122°F (-10-50°C)
Touch Refresh Rate	≥110Hz	Dimensions	Outer Frame: 76.3 x 43.7" (193.8 x 110.9cm) Active Area: 74.7 x 42.0" (189.7 x 106.8cm)



## Eiki International, Inc.

22552 Avenida Empresa, Rancho Santa Margarita, CA 92688  
Phone: 800-242-3454 · Email: usa@eiki.com · Web: www.eiki.com

2024/07-V3 GW

Specifications subject to change without notice.  
EIKI® is a registered trademark of EIKI International, Inc.

©2024 Eiki International, Inc.