




EIP-UHS100

8,000 ANSI Lumens / WUXGA / DLP®
"Large Venue" Series Projector

EIP-UHS100

8,000 ANSI lumens bright and a 2400:1 contrast ratio.
HDMI and 3G HD-SDI Digital connectivity.
Native WUXGA resolution. Compatible with inputs up-to UXGA and WUXGA.
Supports analog and digital video input in all color standards up-to 1080p.
User-changeable color wheel to optimize brightness or color.
Displays both 4:3 and 16:9 aspect ratios. Supports most HDTV resolutions.
Wired network monitoring and control.
Rear-accessed lamp for ease of maintenance.
Optional lens cover a range of 0.75 to 8.56:1 Throw ratios.
Built-in Edge Blending and Image Warping.
Lens Memory Features allow up to 10 saved settings.
Built-in Picture in Picture and Picture by Picture.
Security bar. Kensington® MicroSaver® security slot. PIN lock.
*3 year projector warranty.

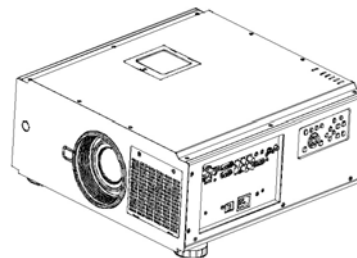

Included Accessories:

Quick Start Guide, Owner's Manual on CD-ROM, VGA Computer Input Cable (Dsub15 to Dsub15), 6.0 ft (1.8 m) Detachable Power Cord
Remote Control (with 2 AA Batteries), Wired Remote Cable (MiniStereo to MiniStereo), Screw for Lens Lock, Color Wheel

Optional Accessories:

Replacement Lamp, Component Video Input Cable (Dsub15 to 3RCA), ATA-Style Case with Wheels and Telescoping Handle, Ceiling Mount, Ceiling Post and Plate. Stacking Frame.

Specifications: Model EIP-UHS100

Brightness	8,000 ANSI Lumens	Video Input Analog	480i/p, 576i/p
Contrast Ratio	2400:1	Video Input Digital	480p, 575p, 720p, 1080i/p
Resolution and Aspect Ratio	WUXGA (1920 x 1200), 16:10	Image Signal Resizing	Smart Scaling Technology
Color Reproduction	10 bit	Image Signal Inputs	
Projection Lamp	400 Watts UHP x 2	Computer 1	Dsub15 x 1
Estimated Lamp Life	up-to 2,500 hours	Computer 2 / Component (w/ optional adapter)	5 BNC x 1
Total Pixels	2,304,000 (1920 x 1200) x 1	Digital Video (w/ HDCP)	HDMI x 1
Imaging System	0.67" DMD™ DLP® chip x 1	Digital Video (w/ HDCP)	DVI-D x 1
Scanning Frequency	Auto: H Sync. 31-108 kHz, V Sync. 48-120 Hz	3G HD-SDI	BNC x 1
Pixel Clock	154 MHz	Screen Trigger	DC12V x 1
Lens	Optional Lenses Available	Outputs	
Lens Specs	Speed: f: 2.5-2.76; FL: 0.925-1.110 in (23.5-28.2 mm)	3G HD-SDI	BNC x 1
Lens Ratios	Zoom Max:Min: 1.3:1 ; Throw:Width 1.73-2.27:1	Fan Noise (Normal / Eco)	43 / 39 dB
Image Diagonal	40-500 in (101.6-1270 cm)	Cabinet Size (HxWxD) - excluding legs	9.0 x 19.9 x 20.5 in (22.8 x 50.5 x 52 cm)
Image Width	1.7-21.3 ft (0.52-6.5 m)	Weight	52.9 lb (24 kg)
Throw Distance	5.9-48.8 ft (1.8-14.9 m)	Packaged Size (HxWxD)	15.6 x 26.1 x 28.3 in (39.6 x 66.2 x 71.8 cm)
Projector Elevation Adjustment (legs)	up-to 10°	Packaged Weight	60.6 lb (27.5 kg)
Maximum Pitch	up-to 15° Up or Down	Operating Temperature	41-95°F (5-35°C)
Vertical Keystone Correction	Digital: up-to 20° Up or Down	Electrical Safety Compliance	IEC / UL / cUL
Horizontal Keystone Correction	Digital: up-to 35° Left or Right	Electromagnetic Compatibility	FCC Class B, CE Mark
Image Orientation	Normal, Reversed, Inverted	Power Requirements	100-240V AC, 50/60 Hz
Local Control / Power Management	Full Function / Auto Shutdown	Power Consumption	0.5 W in Eco Standby mode, up-to 995W
Remote Control / Service	Wireless / Wired x 1 / USB-B x 1	Heat	up-to 3,396 BTU/hr
Remote Control / RS-232 Control	MiniStereo x 1 / Dsub9 x 1	Security Facilities	Security Bar, Kensington® Security Slot
LAN Port	RJ45 x 1	UPC	4571194676570
Computer Input in Pixels	up-to 1600x1200 (4:3), 1920x1200 (16:10)	User Maintenance	Replace Lamp / Replace Filter
Analog 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC	Limited Warranty: to the original end use customer only	
Analog Wide Inputs	WUXGA, WSXGA+, WXGA+, WXGA	Projector	*3 years / 6000 hours
Digital 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC	Lamp	*1 year ownership / 500 hours use
Digital Wide Inputs	WUXGA, WSXGA+, WXGA+, WXGA		*(whichever occurs first)

Caution! Laser Radiation - Do not stare into beam. Max. Output: 1m Wave Length: 640 ~ 660 nm. Class II Laser Product
Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Local, State or Federal Laws.
EIKI® is a registered trademark of Eiki International Inc. Kensington is a registered trademark of ACCO Brands Corporation.

Specifications subject to change without notice. ©2014 Eiki International Inc. Issued Mar. 9, 2016
Eiki International Inc., 30251 Esparanza, Rancho Santa Margarita, CA 92688-2132. Tel: 800-242-3454; Fax: 800-457-3454, Email: usa@eiki.com
In Canada: 9170 County Rd. 93, Suite 304, Midland ON, L4R 4K4. Tel: 800-563-3454, Email: canada@eiki.com