

9_]`Å `GYm]b[`h`Y`BYk `; c`X`GhUbXUfX`]b
 <][\ `6f][\ hbYggž <][\ `DYfZcfa UbWž <][\ `a U[Y`E i U]m
 k]h` h`Y`9=Đ! I `H%\$\$`@Uf[Y`7`Ugg` ! 7\]d`8@D`Dfc`YVWcf`

Ci hghUbX]b[: YUhi fYg.

- %`ž\$\$\$\$`i a Ybg`Vf][\ h`UbX`U`&\$\$\$\$.%`VčbhfUghfU]c`
- ` ! W]d`8@D`h`VWbc`c[m`
- (`8][]H``bdi hg`]bW X]b[` <86UgYH`UbX` ; ` <8! G8`=
- BUh] Y`K I L; 5`fYgc`i h]cb`"7ca dU]V`Y`k]h`]bdi hg`i d! hc`I L; 5`UbX`K I L; 5`
- G`ddcfhg`UbU`c[`UbX`X][]H`]]XYc`]bdi h]b`U` `Wč`cf`ghUbXUfXg`i d! hc`%\$, \$d`
- 8]gd`Umg`Vch` (. `UbX`%*`.- `UgdYVh`fU]cg`"G`ddcfhg`a cgh`<8HU`fYgc`i h]cbg`
- ` 8`Uj U]UV`]m]k]h`GhYfYc`8J`=
- K]fYX`bYhk`cf_`a`cb]hc]b[`UbX`Včbhf`c`"
- 8]Vč`a`G]a`i`U]cb`a`cXY`Zcf`j]Yk]b[`[fUmgWU`Y]a`U[Yg`gi`W`Ug`L!`fUmg`
- FYUf!`UWV`ggYX`"Ua`d`Zcf`YUgY`cZ`a`U]bhYbUbW`"
- Cdh]cbU`"Ybg`Vč] YfU`fUb[Y`cZ`\$`"*`+`hc`*`"-`*`.%`H`fck`fU]cg`"
- 6i`]H`]b`D]Vh`fY`]b`D]Vh`fY`UbX`D]Vh`ffY`VmD]Vh`fY`"
- GYW`f]m]VUf`"?`Ybg]b[hc`b`A`]WcGUj`Yf`g`YVW`f]m]g`ch`"D-B`"cW`"
- GY`Vh`VYhk`YYb`%%)`J`UbX`&`\$`J`"
- `mYUf`dfc`YVWcf`k`UffUbm`i`



f9=Đ! I `H%\$\$`g`vck`b`k`]h`cdh]cbU`"Ybgk.

EIKI

Projectors ... and more!

EIP-UJT100


14,000 ANSI Lumens WUXGA 3-Chip DLP

EIP-UJT100 Large Venue Projector

High Image Quality with Stunning Color Reproduction.

EIP-UJT100 SPECIFICATIONS

Brightness	14,000 ANSI Lumens
Contrast Ratio	2000:1
Resolution and Aspect Ratio	WUXGA [1920 x 1200], 16:10
Color Reproduction	10-bit
Projection Lamp	465 Watts NSH x 2
Estimated Lamp Life	up to 2,500 Hours
Total Pixels	6,912,000 [1920 x 1200] x 3
Imaging System	0.96" DMD™ DLP® chip x 3
Scanning Frequency	Auto: H Sync. 15.63-91.15 kHz, V Sync. 23.98-120 Hz
Pixel Clock	162 MHz
Lens	Optional Lenses Available - See lens chart on website
Lens Specs	Optional Lenses Available - See lens chart on website
Lens Ratios	Optional Lenses Available - See lens chart on website
Image Diagonal	80-600 in [203.2-1524 cm]
Image Width	5.6-42.5 ft [1.7-12.9 m]
Throw Distance	Optional Lenses Available - See lens chart on website
Projector Elevation Adjustment (legs)	up to 5°
Vertical Keystone Correction	Digital: up to 20° Up or Down
Horizontal Keystone Correction	Digital: up to 35° left or Right
Image Orientation	Normal, Reversed, Inverted
Local Control / Power Management	Full Function / Auto Shutdown
Remote Control / Service	Wireless / Wired x 1 / USB-B x 1
Remote Control / RS-232 Control	MiniStereo x 1 / Dsub9 x 1
LAN Port	RJ45 x 1
Computer Input in Pixels	up to 1600x1200 [4:3], 1920x1200 [16:10]
Analog 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
Analog Wide Inputs	WUXGA, WSXGA+, WXGA+, WXGA
Digital 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
Digital Wide Inputs	WUXGA, WSXGA+, WXGA+, WXGA
Video Input Analog	480i/p, 576i/p
Video Input Digital	480p, 575p, 720p, 1080i/p
Image Signal Resizing	Smart Scaling Technology
Image Signal Inputs:	
Computer 1	Dsub15 x 1
Computer 2	5 BNC x 1
Digital Video (w/ HDCP)	HDMI x 1
Digital Video (w/ HDCP)	DVI-D x 1
Component Video	RCA x 3
HDBaseT Lite	RJ45 x 1
3D Sync	BNC x 1
3G HD-SDI	BNC x 1
Screen Trigger	DC12V x 2
Outputs	
3D Sync	BNC x 1
3G HD-SDI	BNC x 1
Fan Noise [Normal / Eco]	48 / 42 dB
Cabinet Size (HxWxD) - excluding legs	10.6 x 19.8 x 25.0 in (26.9 x 50.2 x 63.5 cm)
Weight	81.5 lb (37 kg)
Packaged Size (HxWxD)	17.2 x 26.6 x 31.8 in (43.6 x 67.5 x 80.7 cm)
Packaged Weight	92.5 lb (42 kg)
Operating Temperature	41-95°F (5-35°C)
Electrical Safety Compliance	IEC / UL / cUL
Electromagnetic Compatibility	FCC Class A, CE Mark
Power Requirements	100-240V AC, 50/60 Hz
Power Consumption	0.5 W in Eco Standby mode, up to 1230W
Heat	up to 4,198 BTU/hr
Security Facilities	Security Bar, Kensington® Security Slot
UPC	4571194677270
User Maintenance	Replace Lamp / Replace Filter
Limited Warranty: to the original end-user customer only	
Projector	3 years / 60000 hours (whichever occurs first)
Lamp	1 year / 500 hours use - original lamp (whichever occurs first) 90 days / 500 hours use - replacement lamp (whichever occurs first)

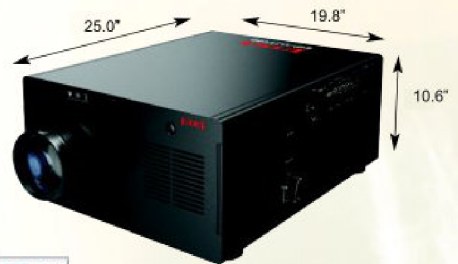

EIP-UJT100 Large Venue Projector.
14,000 ANSI Lumens ♦ WUXGA ♦ 3-Chip DLP®

Included Accessories:


Quick Start Guide, Owner's Manual on CD-ROM, VGA Computer Input Cable (Dsub15 to Dsub15), 6.0 ft (1.8 m) Detachable Power Cords x 2 Remote Control (with 2 AA Batteries), Wired Remote Cable (MiniStereo to MiniStereo).

Optional Accessories:

Replacement Lamp, ATA-Style Case with Wheels and Telescopic Handle, Ceiling Mount, Ceiling Post and Plate.



Front Filter.



Rear Filter.



Easy access to front and rear filters.



EIKI® is a registered trademark of Eiki International, Inc. Kensington® is a registered trademark of ACCO Brands Corporation. HDMI® is a registered trademark of HDMI Licensing LLC.

EIKI®
Projectors... and more!

Specifications subject to change without notice.

©2015 Eiki International, Inc. Printed in the USA. 06/01/15

Eiki International, Inc.

30251 Esperanza, Rancho Santa Margarita, CA 92688-2130
Tel: 800-242-3454, Fax: 800-457-3454, E-mail: usa@eiki.com
In Canada, 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8
Phone: 800-563-3454, Fax: 800-567-4069, E-mail: canada@eiki.com

<http://www.eiki.com>