




Projectors... and more!

LC-W3

WXGA BOARDROOM Projector

Key Features: Model LC-W3

- 3000 ANSI Lumens bright, at 90%+ uniformity, and a 1000:1 contrast ratio.
- True WXGA resolution. UXGA ~ VGA and MAC compatible.
- Compatible with HDCP and video input resolutions up to 1080p.
- Supports NTSC/PAL/SECAM/NTSC 4.43/PAL-M/PAL-N video standards.
- Accepts a wide range of interchangeable lenses.
- 3 panel LCD imaging for rich, color saturated visuals.
- Projects images up to 29' wide (400" diagonal) at 16:9.
- Power zoom and focus. Power lens shift.
- Advanced color adjustment software built-in.
- Wireless/wired remote control. Optional local and network control systems.
- 3 Year* Projector Warranty!

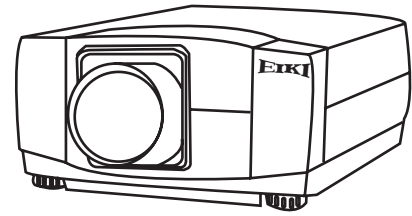

LC-W3

Breakthrough Features

1. Native WXGA resolution with high brightness and contrast.
2. Supports WXGA and XGA computer input, compatible up to UXGA.
3. Compatible with analog video inputs up to 1080i.
4. Compatible with HDCP and 1080psf24/25/30 digital video input.
5. Wide range of interchangeable lenses available.
6. Built-in i/p conversion and 3:2 pulldown support.

INCLUDED ACCESSORIES: Owner's manual on CD-ROM. Quick Setup manual. AC Power Cord. Lens Cover. Wireless/Wired Remote Control and 2 x AA batteries. Serial (DB9~8DIN) Control Cable (RS-232).

OPTIONAL ACCESSORIES: VGA-type Computer input cable. MAC Adapter. 1.5 M wired remote cable. Replacement Lamp. DVI Cable. Soft Carry Bag. Luggage Style Carry Case with Wheels and Telescoping Handle, and Detachable Computer Compartment. ATA-Style Shipping Case with Wheels and Telescoping Handle. Wideangle and Telephoto Lenses. Ceiling Mount, Ceiling Post and Plate. 33' (10M) Mouse Extension Cable. Pj-to-NetDirector interface. EZ-250 Local Control. NPC-1 Network Control.

SPECIFICATIONS: Model LC-W3

Screen Brightness	3000 ANSI Lumens	Video: HDTV Compatibility	480i/p, 575i/p, 720p, 1035i, 1080i-50/60
Illumination Uniformity	90%+	Video: Formats Supported	1080PsF/24, 1080PsF/25, 1080PsF/30
Color Reproduction	10 bit / 1.07 Billion Colors	Video: Image Resizing	4:3 and 16:9
Contrast Ratio	1000:1 (Full ON/OFF)	Video: Systems	Video Scaling Technology
Horizontal Resolution	800 TV Lines (HDTV)	Input Channels 3 (1. Compter; 2a. Computer or 2b. Video; 3. Video)	
Projection Lamp	300 Watts NSH	Inputs:	
Estimated Lamp Life	1500 Hours	1. Computer: HD15 x 1, DVI-D x 1	
Imaging System	1.21" Polysilicon active matrix TFT Panels x 3	Audio: Stereo: MiniStereo x 1 (L x R)	
Screen Pixels	1366 x 768 in stripe configuration	2a. either Computer: BNC x 5 (RGBHV)	
Total Pixels	3,147,264 ((1366 x 768) x 3)	2b. or Video: BNC x 3:(Composite / Component:Y,Pb/Cb,Pr/Cr)	
Lens Type	Power Zoom & Focus	plus, Audio: Stereo: MiniStereo x 1 (L x R)	
Lens Specs	Speed: f: 1.8~2.1; FL: 1.90~2.47 in. (48.4~62.8mm)	3. Video: RCA x 3 :(Composite / Component:Y,Pb/Cb,Pr/Cr) S-Video x 1	
Lens Ratios	Zoom Max:Min: 1.3:1; Throw: Width: 1.81~2.36:1	Audio: RCA x 2 (L & R Stereo)	
Image Diagonal	30~400 in. (76.2~1016 cm)	Audio: Amplifier	Stereo: 2 Watts RMS
Image Width	2.2~29.1 ft. (0.67~8.87m.)	Audio: Built in Speakers	Stereo: 2 in. (5 cm.) x
Throw Distance	5.0~52.2 ft. (1.5~15.9m.)	2 Fan Noise	
Front Elevation	up to 10.5°up		33 dBA
Anti Keystone	Power Lens Shift, Ratio (Top:Bottom) 7:-1~1:1	Size (HxWxD)	6.6 x 12.6 x 16.9 in. (168 x 319 x 429.5 mm.)
Vertical Keystone Correction	Digital: up to 30° up or down	Weight	19.2 lb. (8.7kg.)
Horizontal Keystone Correction	Digital up to 20° left or right	Packaged Size (HxWxD)	12.0 x 17.1 x 24.2 in.(305 x 434 x 614mm.)
Scanning Frequency	Auto: H Sync. 15-100 kHz; V Sync. 48-100 Hz	Packaged Weight	27.6 lb. (12.5 kg.)
Dot Clock	180 MHz	Power Requirements	100 - 240V AC, 50/60 Hz
Image Orientation	Normal, Reversed, Inverted	Power Consumption	450 W
Local Control / Power Management	Full Function / Auto Shut-off	Heat	1536 BTU/hr.(387 Kcal./hr.)
Remote Projector & Mouse Control	Wireless / Wired x 1	Power Cord	10' (3M) T type 3, Detachable
Ports:	Control: 8-pin DIN x 1, Wired RC: MiniStereo x 1	Safety Compliance	UL , cUL
Computer: Native Resolution	1366x768(WXGA)	Security Facilities	Kensington Security Slot
Computer: Compatibility	UXGA, SXGA+, WXGA, SXGA, XGA, SVGA, VGA and MAC	Operating Temperature	41~95°F (5~35°C)
Computer: Formats	1600 x 1200 ~ 640 x 480	User Maintenance	Clean Air Filter, Replace Lamp
Computer: Imaging Sizing	Normal, or Smart Compressed or Expanded	Warranty (to the original end-use customer)	
Video: System Compatibility	NTSC/PAL/SECAM/NTSC 4.43/PAL-M/N	Projector	3 Yr./6000 hr. *(Parts/Labor to Correct Defects)
		Lamp	90 days (Failed Lamp Replaced Pro-Rata)

Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Local, State or Federal Laws.

Specifications subject to change without notice. ©2006 Eiki International, Inc. Issued March 10, 2006.

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688-2132. Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com
In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8. Tel: 800-563-3454, Fax: 800-567-4069, E-mail: canada@eiki.com
Visit our World Wide Web site: <http://www.eiki.com>