

Preliminary
Specifications

LC-XIP2000

Ultrawide Interactive XGA LCD Projector 2000 ANSI Lumens

Interactive Presenter Features

- ◆ Interactive function permits real-time annotation of projected image.
- ◆ Pen & pointer function as both writing instruments & computer mouse.
- ◆ Included software for advanced functionality, including screen capture.

Ultrawide Projector Features


- ◆ Extremely Short Throw Lens: as close as a 1 : 1 Throw-to-Width Ratio
- ◆ 2000 ANSI Lumens, 85% uniformity, and 400:1 contrast ratio.
- ◆ Weighs less than 8 lbs! Compact, low-profile design!
- ◆ 3 panel LCD imaging delivers a rich, color saturated picture.
- ◆ XGA resolution. SXGA ~ VGA compatible.
- ◆ Smart data compression / expansion, and video scaling.
- ◆ Two VGA computer inputs, plus one VGA computer monitor output.
- ◆ Preset image offset. Vertical digital keystone correction.
- ◆ Accepts Composite, S, and Component Video in all major standards.
- ◆ Displays both 4:3 and 16:9 formats. Supports most HDTV resolutions.
- ◆ Wireless remote control w/Laser. 4X digital zoom. Auto input search.
- ◆ 3 Year* Projector Warranty!



EIKI
Projectors... and more!

LC-XIP2000

2000 ANSI lumens

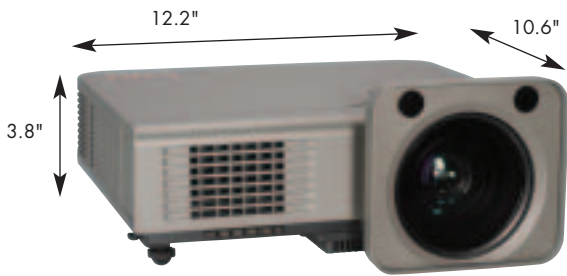

Input Panel



Wireless Remote Control



Lamp Contains Mercury.
Do not put in trash. Dispose-of-as
Hazardous Waste, according to the
laws in your jurisdiction.



INCLUDED ACCESSORIES:

Quick Start Guide. Owner's Manual on CD-ROM. AC Power Cord.
Computer Input Cable (HD15 ~ HD15). S-Video Input Cable (S-Video~S-Video) Composite Video Input Cable (RCA~RCA) Audio Input Cable (2RCA ~ Mini Stereo) USB Mouse Cable (USB-A ~ USB-B)
Wireless Remote Control w/ Laser Pointer & Batteries (AAA x 2).

OPTIONAL ACCESSORIES:

Replacement Lamp. Carry Bag. Component Video Input Cable (HD15~3-RCA). RS-232C Input Cable (DB9~Mini DIN-8). 15' (5M) USB Extension Cable and AC Adapter, Ceiling Mount. Ceiling Post and Plate. EZ-250 Local Control. NPC-1 Network Control.

Interactive Presenter: Minimum System Requirements

Computer: PC only (Interactive Presenter not available for MAC)
Computer CPU: Intel Pentium IV
System RAM: 256 Mb
Available HD capacity: 30 MB
Other: CD-ROM drive, USB 2.0 terminal

Interactive Presenter: Specifications

Included Accessories: Bag including Pointer, Pen, AA Batteries x 4
Optional Accessories: 15' (5M) USB Extension Cable and AC Adapter

Interactive Presenter: Operating Range

Image Diagonal: Interactive Projection 50~150 in. (1.27~ 381 cm)
Image Width: Interactive Projection 3.3~10 ft. (1.02~ 3.1 m)
Interactive Throw Distance (tele~wide): 2.6~19.8 ft. (.08~ 6.0 m)




Specifications subject to change without notice.
©2007 Eiki International, Inc. Printed in the USA. 07/01/07

SPECIFICATIONS: LC-XIP2000

Brightness up to 2000 ANSI Lumens
Illumination Uniformity 85%
Size of Color Palette 16.7 Million
Contrast Ratio 400:1 (Full ON/OFF)
Projection Lamp 200 Watt NSH
Estimated Lamp Life up to 2000 Hours of Use
Imaging System 0.63" PolySilicon active matrix TFT Panels x 3
Screen Pixels 1024 x 768 in stripe configuration
Total Pixels 2,359,296 ((1024 x 768) x 3)
Lens Type Manual Zoom and Focus
Lens Specs Speed: f:1.6~1.88; FL: 0.49~0.59 in. (12.4~14.9 mm)
Lens Ratios Zoom Max:Min: 1.2:1; Throw:Width: 0.98~1.17:1
Image Diagonal: Normal Projection 40~300 in. (101.6~762 cm)
Image Width: Normal Projection 2.7~ 20 ft. (0.81~6.1 m)
Throw Distance (tele ~ wide) Normal 2.6~19.8 ft. (0.79~6.04 m.)
Front Elevation Up to 14° Up
Anti Keystone Fixed Image Offset, Ratio (Top:Bottom) 6.5:1
Vertical Keystone Correction Digital: up to 30° up or down
Scanning Frequency Auto: H Sync. 15-69kHz; V Sync. 43-85Hz
Dot Clock 110 MHz
Image Orientation Normal, Reversed, Inverted
Remote Projector Control Wireless (Infra Red) x 1
RS-232C Control Port Mini DIN 8 Pin x 1
Computer Native Resolution 1024 x 768 (XGA)
Computer: Compatibility SXGA, XGA, SVGA, VGA
Computer: Formats 1280x1024 through 640x480
Computer: Higher Resolutions Displayed panned or Smart Compressed
Computer: Lower Resolutions Displayed normal or Smart Expanded
Video Compatibility NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
Video HD Compatibility 480i/p, 575i/p, 720p, 1035i, 1080i
Formats Supported Normal 4:3 and Wide Screen 16:9
Video: Image Sizing Video Scaling Technology
Signal Inputs	
Computer 1 HD15 x 1
Computer 2 / Component Video (w/optional adapter): HD15 x 1
S-Video S-Video x 1
Composite Video RCA x 1
Audio: MiniStereo x 1
Outputs	
Computer Monitor: HD15 x 1
Audio (Stereo) - Line: MiniStereo x 1
Sound System - Amplifier: 2 Watts (Mono)
Sound System - Speaker: 1.6 x 1.2 in. (4x3 cm) x 1(Ellipse)
Fan Noise as low as 41 dBA
Cabinet Size (HxWxD) 3.8 x 12.2 x 10.6 in. (96 x 310 x 270 mm.)
Including lens and feet 5.3 x 12.3 x 13.2 in. (135 x 311 x 334 mm.)
Weight 7.7 lb (3.5 kg)
Packaged Size (HxWxD) 9.9 x 17.7 x 13.8 in (250 x 450 x 350 mm)
Packaged Weight 13.7 lb (6.2 kg)
Power Requirements 100-240V AC, 50/60Hz
Power Consumption Up to 250 Watts
Heat up to 853 BTU (215 KC)
Power Cord 6' (1.8M) Type 3, Detachable
Safety Compliance UL, cUL, IEC
Security Facilities Kensington® Security Slot
Operating Temperature 41~95°F (5~35°C)
User Maintenance Clean Air Filter, Replace Lamp
Warranty: (to the original end-use customer)	
Projector: 3 Years / 6000 Hour Use*(Parts & Labor to Correct Defects)
Lamp: 90 Days (Failed Lamp Replaced Pro-Rata * Whichever occurs first

Talk to your Eiki Dealer... the "pro" in projectors.



Eiki International, Inc.

30251 Esperanza, Rancho Santa Margarita, CA 92688-2130
Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com

In Canada, 310 First St.- Unit 2, P.O. Box 156, Midland, ON L4R 4K8
Phone: 800-563-3454, Fax: 800-567-4069 E-mail: canada@eiki.com

<http://www.eiki.com>