

LC-XIP2600

XGA Short Throw + "Interactive" LCD Projector


EIKI
Projectors & Beyond

The Entirely New Communication Projector.



Outstanding Features

- XGA Short Throw Projector / Brightness 2,600 Lumens (Powerful mode).
- Interactive function permit real-time annotation of projected image.
- Pen & Pointer function as both writing instruments & computer mouse.
- 6 Auto functions : "Auto-" Search, Sync, Ceiling, Keystone, Filter Alert and Lamp Usage Alert.
- Power-off and go "10 seconds".
- Built-in 8-Watt Audio Speaker.
- Anti-Dust model "Double Layer Anti-Dust Filter"
Suitable for tough environments :
Sand, Dust, Chalk dust, Fungus, Pollen and Coarse dust.
- Free installation : Vertical 360 degrees.
- Easy maintenance : Side change filter & lamp.
- More Security Built-in security bar.
- Customized Logo.
- LAN (RJ-45).
- Closed caption decoding (NTSC).

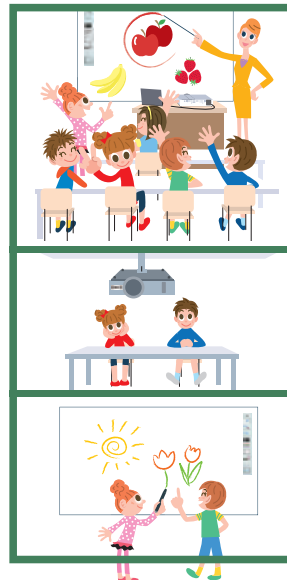


With LC-XIP2600, you can virtually create a touch screen on any form of projection surface.

Write, erase, store / restore and control applications with pointer & pen.

PC + LC-XIP2600
= Interactive Whiteboard !

LC-XIP2600 XGA Short Throw + "Interactive" LCD Projector

Terminal/Remote control

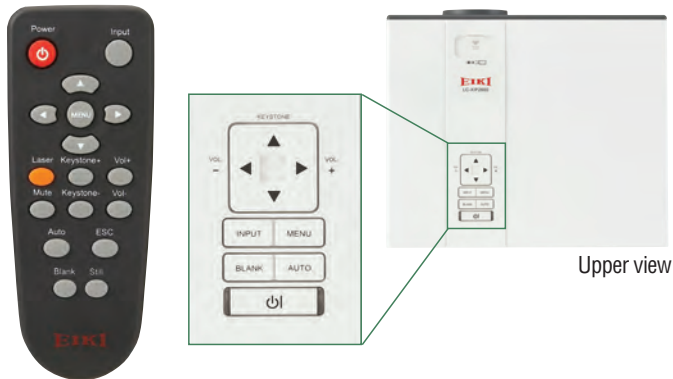

Remote control

Upper view



Terminal

Double Layers Filters



Anti-Dust Filter

Soft case



CAUTION
LASER RADIATION—
DO NOT STARE INTO BEAM
MAX OUTPUT : 1 mW
WAVE LENGTH : 650 nm
CLASS II LASER PRODUCT

Hg
Lamp Contains Mercury.
Do not put in trash.
Dispose-of-as Hazardous
Waste, according to the
laws in your jurisdiction.

Specifications

Screen Brightness (ANSI)	Up to 2,600 Lumens (Powerful mode)*1
Illumination Uniformity	85 %
Size of Color Palette	16.7 Million
Contrast Ratio	500 : 1 (Full ON / OFF)
Projection Lamp	230 W NSH
Estimated Lamp Life	Up to 3,000 / 2,000 Hours of Use (Normal / Powerful)
Imaging System	0.63" PolySilicon active matrix TFT Panels x 3
Screen Pixels	1,024 x 768 in stripe configuration
Total Pixels	2,359,296 (<1,024 x 768> x 3)
Lens Type	Manual Zoom and Focus
Lens Specs	Speed : f: 1.65 ~ 1.93, FL : 0.72 ~ 0.87 in. (18.53 ~ 22.18 mm)
Lens Ratios	Zoom Max : Min : 1.2 : 1, Throw : Width : 0.97 ~ 1.19 : 1
Image Diagonal : Normal Projection	40 ~ 300 in. (101.6 ~ 7.37 cm)
Image Width : Normal Projection	2.7 ~ 20 ft. (0.81 ~ 6.1 m)
Throw Distance (Tele ~ Wide)	2.52 ~ 20.07 ft. (0.77 ~ 6.12 m)
Front Elevation / Maximum Pitch	Up to 8.5° up / Up to 8.5° up or down
Anti Keystone	Fixed Image Offset, Ratio (Top : Bottom) 5 : 1
Vertical Keystone Correction	Digital : up to 30° up or down
Scanning Frequency	Auto : H Sync. 31 ~ 92kHz, V Sync. 48 ~ 120Hz
Dot Clock	162 MHz
Image Orientation	Normal, Reversed, Inverted
Remote Projector Control	Wireless (Infra Red) x 1
RS-232C Control Port	Mini DIN 9 Pin x 1
Computer Native Resolutio	1,024 x 768 (XGA)
Computer : Compatibility	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
Computer : Formats	1,600 x 1,200 through 640 x 480
Computer : Higher Resolutions	Displayed panned or Smart Compressed
Computer : Lower Resolutions	Displayed normal or Smart Expanded
Video Compatibility	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
Video HD Compatibility	480i/p, 575i/p, 720p, 1035i, 1080i
Formats Supported	Normal 4 : 3 and Wide Screen 16 : 9

Video : Image Sizing	Video Scaling Technology
Computer 1	DVI-I x 1
Computer 2	HD15 x 1
Signal	Component Video
Inputs	S-Video
	Composite Video
	Audio
Outputs	Computer Monitor
	Audio (Stereo) : Line
Sound System : Amplifier	8 W (Mono)
Sound System : Speaker	1.6 x 1.2 in. (4 x 3 cm) x 1 (Ellipse)
Fan Noise	As low as 40 dBA
Cabinet Size (H x W x D)*2	4.40 x 12.79 x 10.51 in. (111.9 x 325 x 267.1 mm)
Weight	8.53 lb (3.87 kg)
Packaged Size (H x W x D)	9.9 x 17.7 x 13.8 in (429 x 487 x 242 mm)
Packaged Weight	13.7 lb (6.2 kg)
Power Requirements	100 ~ 240 V AC, 50 / 60 Hz
Power Consumption	Up to 315 W
Heat	Up to 853 BTU (215 KC)
Power Cord	6' (1.8M) Type 3, Detachable
Safety Compliance	UL, cUL, IEC
Security Facilities	Kensington® Security Slot
Operating Temperature	41 ~ 95 °F (5 ~ 35 °C)
User Maintenance	Replace Air Filter, Replace Lamp
Standard Accessories	Owner's Manual (CD-ROM) x 1, Quick guide x 1, Remote control (with AAA batteries x 2) x 1, Power cord (1.8 m), Computer cable (1.5 m) x 1, USB cable (1.5 m) x 1, LAN & Application soft(CD-ROM), Pen(with AAA batteries x 2), Pointer(with AA batteries x 2), Soft case(for Pen & Pointer)
Optional Accessories	Replacement Filter, Replacement Lamp, Ceiling Mount, Ceiling Post and Plate

*1 Default setting 1800 Lumens (Normal mode)
*2 Excluding legs and lens

EIKI
Projectors & Beyond

Eiki Industrial Co., Ltd.
4-12 Banzai-cho, Kita-Ku, Osaka, Japan
Tel: (6) 6311-9479 • Fax: (6) 6311-8486
EIKI World Web Site: <http://www.eiki.com>

Talk to your EIKI Dealer... the "pro" in projectors.



Specifications subject to change without notice.
2009 EIKI Industrial Co., Ltd. Printed in Japan.