



Projectors... and more!

LC-XSP2600


- 2,600 ANSI lumens bright with 85% uniformity and a 500:1 contrast ratio.
- Native XGA resolution. Compatible with inputs up-to UXGA and WSXGA+.
- Supports analog and digital video input in all color standards up-to 1080p.
- 3 panel LCD imaging delivers a rich, color-saturated picture.
- 8-bit color processing yields a 16.7 million color palette.
- Short throw, fixed focal length lens with manual focus.
- Fixed image offset. Vertical digital keystone correction.
- Accepts composite, component, and S-Video in all major standards.
- Built-in 8 Watt amplifier. Closed Caption decoding.
- Built-in wired LAN connection for projector monitoring and control.
- Long lamp life: up-to to 6,000 hours.
- Kensington® security slot. Optional local or remote keylock.
- Compact and lightweight design.
- Blackboard and colorboard modes.
- 3 year projector warranty.

LC-XSP2600

2,600 ANSI Lumens / XGA / 3LCD

Short Throw: fill screens in a distance of half their width

Long Life Lamp - up-to 6,000 Hours

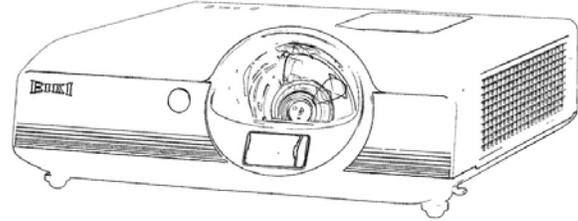

LC-XSP2600

Included Accessories: Quick Start Guide, Owner's Manual on CD-ROM, Power Cord, Network Software on CD-ROM, VGA Computer Input Cable (Dsub15 to Dsub15), Wireless Remote Control (with 2 AAA Batteries), Lens Cover. USB Cable.

Optional Accessories: Replacement Lamp, Replacement Air Filter, Ceiling Mount Post & Plate,

SPECIFICATIONS: Model LC-XSP2600

Brightness	up-to 2,600 ANSI Lumens	Image Signal Inputs	
Contrast Ratio	up-to 500:1	1. Analog Computer	Dsub15 x 1
Illumination Uniformity (corner to center)	85%	2. Digital with HDCP	DVI-I x 1
Resolution and Aspect Ratio	XGA (1024x768), 4:3	3. Component Video	RCA x 3
Color Reproduction	8-bit (16.7 million colors)	4. S-Video	S-Video x 1
Projection Lamp	210 Watts UHP	5. Composite Video	RCA x 1
Estimated Lamp Life	up-to 6,000 Hours	Audio Signal Inputs	
Imaging System	0.63in (16 mm) LCD Panels x 3	For Computer Inputs	Stereo: MiniStereo x 2
Total Pixels	2,359,296 ((1024x768) x 3)	For Video Inputs	Stereo: RCA x 2
Scanning Frequency	Auto: H: 31-92 kHz; V: 48-120 Hz	Outputs	
Pixel Clock	up-to 162MHz	Computer Monitor	Dsub15 x 1
Lens	Attached - Fixed FL, Manual Focus	Audio Output	Variable, Stereo: MiniStereo x 1
Lens Specs	Speed: f: 1.8; FL: 0.322in (8.2mm)	Amplifier	8Watt
Lens Ratio	Throw:Width 0.61:1	Speaker	2in (5cm) x 1 (Mono)
Image Diagonal	60-110 in (152-279 cm)	Fan Noise	as low as 33.5dBA
Image Width	3.3 - 7.3 ft (1.0 - 2.2 m)	Cabinet Size (HxWxD)	5.2 x 13.7x 14.1in (132 x 348 x 360mm)
Throw Distance	2.1-3.9 ft (0.61-1.390 m)		(excluding legs)
Projector Elevation Adjustment (legs)	up-to 7° Up	Weight	9 lb (4.1 kg)
Maximum Pitch	up-to 360°	Packaged Size (HxWxD)	9.2 x 18.2 x 19in (233 x 464 x 481mm)
Vertical Lens Shift (% of image height)	Fixed: 110% Up	Packaged Weight	14.3 lb (6.5kg)
Vertical Keystone Correction	Digital: up-to 30° Up or Down	Power Requirements	100-120V AC, 50/60 Hz
Image Orientation	Normal, Reversed, Inverted	Power Consumption	230W - Eco mode, up-to 295W - Normal
Mouse Control	USB Type B x 1	Heat	785 BTU/hr - Eco mode, up-to 1.007BTU/hr - Normal
Local Control / Power Management	Full Function / Auto Shutdown	Power Cord	1.8 m (6 ft), IEC type C13, Detachable
RS232 Control Port	Dsub9 x 1	Electrical Safety Compliance	IEC / UL / cUL
Remote Projector Control	Wireless (Infra Red) x 1	Electromagnetic Compatibility	FCC Class B, CE Mark
LAN Port	RJ45 x 1	Security Facilities	Kensington Security Slot, PIN Code and Key Locks
Computer Input in Pixels	up-to 1600x1200 (4:3), 1680x1050 (16:10)	Operating Temperature	41-95°F (5-35°C)
Analog 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC	User Maintenance	User clean Filter, Change Lamp
Analog Wide Inputs	WSXGA+, WXGA+, WXGA	UPC	4571194675009
Digital 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC	Limited Warranty: to the original end-use customer only	
Digital Wide Inputs	WSXGA+, WXGA+, WXGA	Projector	3 years
Video Formats	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N	Lamp	90 days / 500 hours use (whichever occurs first)
Image Signal Resizing	Smart Scaling Technology		
Video Input Analog	480i/p, 575i/p, 720p, 1035i, 1080i		
Video Input Digital	480p, 575p, 720p, 1035i, 1080i/p		

Summary

Combining rich color 3LCD imaging technology, XGA resolution, and a short throw optical system, here's a Classroom or Meeting Room projector that delivers maximum picture in minimum space, with a minimum of maintenance.

Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Local, State or Federal Laws.

EIKI® is a registered trademark of Eiki International, Inc. Kensington is a registered trademark of ACCO Brands Corporation.

Specifications subject to change without notice. ©2011 Eiki International, Inc. Issued June 9, 2011.

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688-2132. Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com
In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8. Tel: 800-563-3454, Fax: 800-567-4069, E-mail: canada@eiki.com
Visit our website: <http://www.eiki.com>