




Projectors... and more!

LC-XT5

XGA Theater Projector

KEY FEATURES: Model LC-XT5

- 15,000 ANSI Lumens bright at 90% uniformity and a 2000:1 contrast ratio.
- Native XGA. Compatible with UXGA through VGA. Video scaling.
- Projects images up to 40' wide (600" diagonal). (Supplied without lens.)
- Quick Change Lens Installation system. Wide choice of lenses available.
- Power Lens Shift. Lens can be shifted vertically and horizontally.
- Accepts with most video signal input, including DVI, RGB, Y/C, DVD, HDTV.
- Compatible with 480i/p, 575i/p, 720p, 1035i, 1080i/p - 50/60 input resolutions.
- Displays video 4:3 & 16:9 in NTSC/PAL/SECAM/NTSC 4.43/PAL-M/PAL-N.
- DVI input supports HDCP for true digital imaging. 2-3 pulldown support.
- 4 input channels. Interchangeable input modules permit reconfiguration.
- Supplied software permits the preconfiguring of color adjustments.
- Wireless/wired remote control. Digital Zoom 50% ~ 700% (horizontal).
- Capable of extended operation (up to 23 hours / day) with regular maintenance.
- 3 Year / 6000 Hr. use* Warranty.

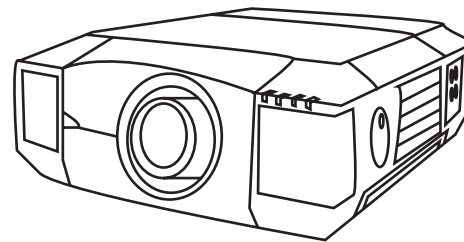

Note:



200~240V AC
NEMA 6-20P

LC-XT5

Supplied without lens. Shown with lens

INCLUDED ACCESSORIES - Owner's Manual on CD. Quick Start Manual. AC Power Cord 10' (3.m). Computer Input Cable 6' (1.8m) HD15~HD15. Wireless/wired Remote Control & 2 x AA batteries. Color Management Software on CD. Lens Mount Adapter x 2. Lens Spacer x 1. Light Block Plates x 3.

OPTIONAL ACCESSORIES - Telephoto, Midrange and Wideangle Lenses. Replacement Lamps. Additional HD15, DVI, 5 BNC, Y/C and PC Input Modules. Warp & Blending Module. Dual (HD & SD) SDI Input Module. Network Control Module. Hard Shipping Case with wheels and Telescoping handle. Ceiling Mount and Post & Plate. EZ-250 Local Control. NPC-1 Network Control.

SPECIFICATIONS: Model LC-XT5

Brightness	up to 15,000 ANSI Lumens (measured with AH-22051 lens)	Video: Standards	NTSC/PAL/SECAM/NTSC 4.43/PAL-M/PAL-N
Uniformity	90%	Video: Formats Supported	Normal 4:3 and Wide Screen 16:9
Color Reproduction	10 bit / 1.07 Billion Colors	Video: Image Sizing	Progressive Video Scaling
Contrast Ratio	2000:1 (Typical lamp control mode "Auto")	Video: Systems Analog:	Composite, Component, S-Video
Horizontal Resolution	800 TV Lines(HDTV)	Digital:	DVI w/HDCP
Projection Lamp	330 Watt NSHA x 4	Video Compatibility Analog:	up to 1080i
Estimated Lamp Life.....	Up to 3,000 hrs.	Digital:up to 1080p-1080psf24,1080psf25, 1080psf30	
Imaging System	1.8" PolySilicon active matrix TFT Panels x 3	Input Modules Interchangeable:.....	standard configuration below
Screen Pixels	1024 x 768 in stripe configuration	1: Computer / Video.....	RGB analog HD15 x 1, DVI-D x 1 w/HDCP
Total Pixels	2,359,296 ((1024 x 768) x 3)	2: Computer / Video.....	5 BNC x 1, S-Video x 1
Lens.....	Not Included		(5BNC supports RGBHV, CV/Y,Pb/Cb,Pr/Cr)
Image Diagonal	40~600 in (101.6~1524cm).	3. Available (unpopulated)	
Image Width	2.67 ~ 40 ft. (0.82 ~ 12.2m)	4. Available (unpopulated)	
Throw Distance	See specifications of selected lens	Fan Noise	as low as 51 dBA
Front Elevation	up to 5.7° up	Size (H x W x D)	9.9 x 22.9 x 32.1 in. (251.5 x 581.6 x 815.5 mm)
Vertical Anti-Keystone	Power Lens Shift, Ratio (max.) (T:B) 10:0~0:10	Weight	80.5 lbs.(36.5 kg)
Horizontal Anti-Keystone	Power Lens Shift , Ratio (L:R) 3:2~2:3	Packaged Size (H x W x D)	25.2 x 34.7 x 48.4 in. (640 x 880 x 1230)
Vertical Keystone Correction	Digital: Variable Adjustment +40° ~ -40°	Packaged Weight	111.3 lb. (50.5 kg)
Horizontal Keystone Correction.....	Digital: Variable Adjustment +20° ~ -20°	Power Requirements	200~240V AC, 9.7 A max, 50/60Hz
Scanning Frequency	Auto: H Sync. 15-120kHz; V Sync. 48-120Hz	Power Consumption / Heat	Max:1800W / 6142 BTU/hr (1548 Kcal/hr)
Dot Clock	230 MHz	Power Cord	10' (3.m) NEMA 6-20P, Detachable
Image Orientation	Normal, Reversed, Inverted	Electrical Safety Compliance	IEC / UL / cUL
Local Control / Power Management	Full Function / Auto Lamp Shut-Off	Electromagnetic Compatibility	FCC Class A, CE Mark
Remote Projector Control	Wireless/Wired x 1	Operating Temperature.....	41~95°F (5~35°C)
Wired Remote Jack	Mini Stereo x 1	User Maintenance	Clean Air Filter, Replace Lamp
RS-232 Control Port	Dsub9 x 2 (In & Out)	Warranty: (to the original end-use customer)	
Computer Native Resolution	1024 x 768 (XGA)	Projector	3 Yr / 6000 hr use * (Parts/Labor to Correct Defects)
Computer Systems.....	Analog: RGB (VGA); Digital: DVI	Lamp	90 Days (Failed Lamp Replaced Pro-Rata)
Computer Compatibility.....	Analog: up to UXGA; Digital: up to SXGA+		* whichever occurs first
Computer: Image Sizing.....	Normal or Smart compressed or expanded		

LC-XT5 Breakthrough Features

1. Our brightest projector yet. 15,000 ANSI Lumens.
2. New LCD panels delivers a remarkable 2000:1 contrast ratio.
3. New Inorganic imaging engine is optimized for extended use.
4. New 10 bit color processing improves color reproduction.
5. Vertical and horizontal lens shift and keystone correction.
6. Color Management software. User logo. Built-in test patterns.

Hg Notice - Projection Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Local, State or Federal Laws

Specifications subject to change without notice. ©2007 Eiki International, Inc. Issued November 15, 2007.

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688-2132. Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com
In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8. Tel: 800-563-3454, Fax: 800-567-4069, E-mail: canada@eiki.com

Visit our World Wide Web site: <http://www.eiki.com>