

EK-500 Series RS232 Command List


1. Connection

1.1 Port Setting

Method	Asynchronous communication
Bits per seconds	19200
Data bits	8
Parity	none
Stop bits	1
Flow control	none

1.2 Wiring

Connect the computer and projector with RS232 cross cable

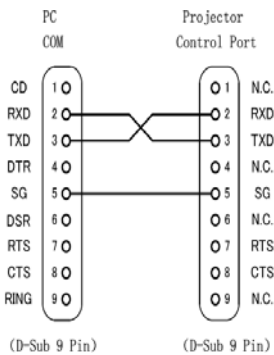

2. Communication

2.1 The Projector command is defined one command/one line that starts "C" and ends carriage return CR .

2.2 There are two types of command, functional execution commands and status read commands

2.3 Response for status read command after accepting has different characters.

Example:

A. Functional execution command:

Power ON command is sent to the projector with "C00" CR, the projector returns a *ACK CR or NAK CR code

PC --> Projector "C" "0" "0" CR

Projector --> PC processing command ACK (or NAK) CR

B. Status read command:

Power Status command is sent to the projector with "CR0" CR, the projector returns a power status plus CR or NAK CR code

PC --> Projector "C" "R" "0" CR

Projector --> PC processing command "0" "0" "0" (or NAK) CR

3. Command List

Command (HEX+CR)	Function
C00(43 30 30 0D)	POWER ON
C01(43 30 31 0D)	POWER OFF(Power OFF immediately)
C02(43 30 32 0D)	POWER OFF
C05(43 30 35 0D)	VGA IN 1
C07(43 30 37 0D)	Video
C34(43 33 34 0D)	S-Video

C32(43 33 32 0D)	DVI
C36(43 33 36 0D)	HDMI
C37(43 33 37 0D)	RGBHV
C8E(43 38 45 0D)	Keystone ↑
C8F(43 38 46 0D)	Keystone ↓
C1C(43 31 43 0D)	Menu on
C1D(43 31 44 0D)	Menu off
C90(43 39 30 0D)	Keystone ∩
C91(43 39 31 0D)	Keystone ∟
C43(43 34 33 0D)	Still on
C44(43 34 34 0D)	Still off
C0D(43 30 44 0D)	Blank on
C0E(43 30 45 0D)	Blank off
C8A(43 38 41 0D)	Timer
C8B(43 38 42 0D)	Timer (Exit)
C0B(43 30 42 0D)	Mute on
C0C(43 30 43 0D)	Mute off
C30(43 33 30 0D)	Digital zoom +
C31(43 33 31 0D)	Digital zoom -
C46(43 34 36 0D)	ZOOM -
C47(43 34 37 0D)	ZOOM +
C4A(43 34 41 0D)	Focus -
C4B(43 34 42 0D)	Focus +
C09(43 30 39 0D)	Volume +
C0A(43 30 41 0D)	Volume -
C5D(43 35 44 0D)	Lens Shift Up
C5E(43 35 45 0D)	Lens Shift Down
C5F(43 35 46 0D)	Lens Shift Left
C60(43 36 30 0D)	Lens Shift Right
C19(43 31 39 0D)	Dynamic
C11(43 31 31 0D)	Normal(Image select)
C39(43 33 39 0D)	Colorboard
C0F(43 30 46 0D)	Screen Normal size(4 : 3)
C10(43 31 30 0D)	Screen Wide size(16 : 9)
C13(43 31 33 0D)	Image Cinema
C14(43 31 34 0D)	Image 1
C18(43 31 38 0D)	Blackboard
C1E(43 31 45 0D)	DISPLAY CLEAR
C20(43 32 30 0D)	BRIGHTNESS +
C21(43 32 31 0D)	BRIGHTNESS -
C33(43 33 33 0D)	Component
C27(43 32 37 0D)	IMAGE (Toggle)
C28(43 32 38 0D)	Direct on Enable
C29(43 32 39 0D)	Direct on Disable
C2A(43 32 41 0D)	Power Management Ready

C2B(43 32 42 0D)	Power Management OFF
C2E(43 32 45 0D)	Power Management Shut down
C3A(43 33 41 0D)	POINTER RIGHT
C3B(43 33 42 0D)	POINTER LEFT
C3C(43 33 43 0D)	POINTER UP
C3D(43 33 44 0D)	POINTER DOWN
C3F(43 33 46 0D)	ENTER
C89(43 38 39 0D)	Auto PC ADJ.
CR3(43 52 33 0D)	Lamp Timer Read
CR0(43 52 30 0D)	Get the projector's operation status:
	"00":Power on
	"80":standby
	"40":Countdown in process
	"20":Cooling Down in process
	"10":Power Failure
	"28":Cooling Down in process due to Temperature Anomaly
	"88":Coming back after Temperature Anomaly
	"24":Power Management cooling
	"04":suspend status (Power management Ready)
	"21":Cooling Down in process after lamp off
	"81":Standby after Cooling Down process due to lamp off
CR1(43 52 31 0D)	Get the information of input source
	"1":HDMI
	"2":DVI
	"3":Computer 1
	"4":Component
	"5":S-Video
	"6":Video
	"7":RGBHV
CR4(43 52 34 00)	Get screen setting status:
	"11":Normal screen setting
	"10":Rear & Ceiling ON
	"01": Rear ON
	"00":Ceiling ON
CR6(43 52 36 0D)	Get the temperature data inside the projector:
	"%1_%2_%3":
	%1=Temperature of Sensor 1
	%2=Temperature of Sensor 2
	%3=Temperature of Sensor 3
	Temperature data is shown as "00.0"
	Get the lamp mode status:

CR7(43 52 37 0D)

"00" Light is out
"01" Light is on
Detect detail of the power failure
"000 MAIN, ALL OK
000 FAN1-4, ALL OK
000 FAN5, LOCK OK
000 FAN6, LOCK OK
000 FAN7, LOCK OK
000 FAN8, LOCK OK
000 HDMI, 5V OK
000 KEYSTONE, 3.3V OK
000 PANEL, 3.3V OK
000 OK

CR ALLPFAIL