




# LC-X8

# XGA Powerhouse Projector

Projectors... and more!

### KEY FEATURES: Model LC-X8

- 10000\*\* ANSI Lumens bright, at 90%+ uniformity, with a 3000:1 contrast ratio.
- XGA resolution. WUXGA ~ VGA and MAC compatible.
- Compatible with Normal and Widescreen input resolutions up to WUXGA and 1080p.
- Supports both analog and digital computer and video input in all color standards.
- Four inputs, including two (unpopulated) module bays. Optional modules available.
- A wide range of optional lenses is available. Projects images up to 600" diagonal.
- Includes both vertical and horizontal lens shift, for optimal projector positioning.
- 10 bit color processing for superior color reproduction.
- Mechanical shutter for true black screen "no show".
- Durable inorganic LCD panels permit extended use.
- Auto-advancing 10-exposure cartridge air filter reduces maintenance.
- Top-accessed filter cartridge and lamphouse permit easy maintenance.
- Wireless/wired remote control. Full RS-232 compatibility. Optional network control.
- 3 Year\* Projector Warranty!

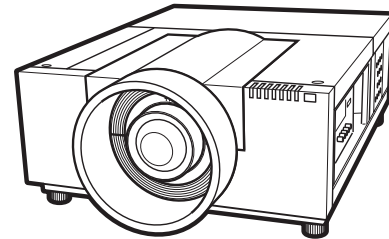

shown with optional lens

### Breakthrough Features

1. 10000\*\* ANSI Lumens brightness XGA in a transportable.
2. LCD panels deliver a remarkable 3000:1 contrast ratio.
3. Inorganic imaging engine is optimized for extended use.
4. Automated filter cartridge system reduces maintenance.
5. Horizontal lens shift and vertical projector orientation.
6. Compatibility up to analog WUXGA, digital 1080p (psf/24/25/30).

**INCLUDED ACCESSORIES** - Owner's Manual on CD-ROM. Quick Start Guide. AC Power Cord 10' (3.m). VGA-type Input Cable Dsub15-Dsub15. Wireless/wired Remote Control & 2 x AA batteries and 1.5M wired remote cable. Color Management Software on CD-ROM. Lens Light Block Sheet x 3. Lens Adapter x 1. Lens Spacer x 1. Lens Mounting Clamp x 1.

**OPTIONAL ACCESSORIES** - Telephoto, Midrange and Wideangle Lenses. Replacement Lamps. Additional DVI-D/HD15, and 5 BNC/Video Input Modules. DVI, Dsub15, 5BNC, and SD/HD-SDI Input Modules. Network Control Module. Hard Shipping Case with wheels and telescoping handle. Ceiling Mount and Post & Plate.

### SPECIFICATIONS: Model LC-X8

Brightness	up to 10000 ANSI Lumens (**with AH-22051 lens)	Video: System Compatibility	NTSC/PAL/SECAM/NTSC 4.43/PAL-M/PAL-N
Illumination Uniformity	90%	Video: Compatibility	480i/p, 575i/p, 720p, 1035i, 1080i-50/60
Color Reproduction	10 bit / 1.07 Billion Colors	Video: Formats Supported	1080psf24/25/30 (digital only)
Contrast Ratio	up to 3000:1 (lamp control in Auto mode)	Video: Image Sizing	16:9 & 4:3
Horizontal Resolution	800 TV Lines (HDTV)	Video: Systems	Progressive Video Scaling
Projection Lamp	330W NSHA x 2	Inputs	Composite, S-Video, Component
Estimated Lamp Life	up to 3000 Hrs.	Inputs 1 & 2: fixed configuration	4
Imaging System	1.8" Inorganic PolySilicon active matrix TFT Panels x 3	Inputs 3 & 4: (unpopulated) module bays	
Screen Pixels	1024 x 768 in stripe configuration	1. a. either Analog Computer: Dsub15 x 1 RGB	
Total Pixels	2,359,296 ((1024 x 768) x 3)	b. or DVI-D x 1 Digital Computer or Video Input w/ HDCP	
Lens	Not Included - choose from a selection of optional lenses	2. a. either Computer: BNC x 5 (RGBHV)	
Image Diagonal	max. 40-600 in. (100-600 in. with AH-22051 lens)	b. or Component Video: BNC x 3 (Y,Pb/Cb,Pr/Cr)	
Image Width	max. 2.67~ 40ft. (0.81 ~ 12.19 m) (except AH-22051)	or Composite Video: BNC x 1 (Video)	
Throw Distance	See specifications of selected lens	or S-Video: S-Video x 1	
Projector Elevation Adjustment	up to 2.8° up or down	3. Available (unpopulated) module bay	
Projector Orientation	360° Pitch (including normal, inverted, up, down)	4. Available (unpopulated) module bay	
Vertical Power Lens Shift	Max Ratio (T:B) 10:0 ~ 0:10	Fan Noise	as low as 45 dBA
Horizontal Power Lens Shift	Max Ratio (L:R) 3:2 ~ 2:3	Size (H x W x D)	10.5 x 20.8 x 29.8 in. (267.5 x 530 x 757 mm.)
Vertical Keystone Correction	Digital: Variable +/-40°	Weight	60.85 lbs. (27.6 kg)
Horizontal Keystone Correction	Digital: Variable +/-20°	Packaged Size (H x W x D)	21.3 x 33.3 x 37.4 in. (542 x 846 x 951 mm)
Scanning Frequency	Auto: H Sync. 15-120kHz; V Sync. 48-120Hz	Packaged Weight	83.8 lb. (38.0 kg)
Dot Clock	230 MHz	Power Requirements	100-120/200-240V AC, 50/60Hz
Image Orientation	Normal, Reversed, Inverted	Power Consumption	up to 950 Watt
Power Management	Auto Lamp Shut-Off	Heat Generated	up to 3,242 BTU / hr (817 Kcal / hr)
Remote Projector Ctrl	Wireless/Wired x 1	Power Cord	10' (3.m) Type 3, Detachable
Service Port	USB-B x 1	Electrical Safety Compliance	IEC, UL, cUL
Wired Remote Jack	Mini Stereo x 1	Electromagnetic Compatibility	FCC Class A, CE Mark
RS-232 Port	(In & Out) Dsub9 x 2	Operating Temperature	41-104°F (5-40°C)
Computer: Native Resolution	1024 x 768 (XGA)	User Maintenance	Replace Air Filter Cartridge, Replace Lamps
Computer: Compatibility	WUXGA, UXGA (analog only), SXGA+, SXGA, WXGA, XGA, SVGA, VGA & MAC	Warranty (to the original end-use customer)	
Computer: Formats	1920 x 1200 through 640 x 480	Projector	3 Yr./ 6000 Hr.*(Parts/Labor to Correct Defects)
Computer: Image Sizing	Normal or Smart compressed or expanded	Lamp	90 Days(Failed Lamp Replaced Pro-Rata)

\*\* Whichever occurs first

Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Local, State or Federal Laws.

Specifications subject to change without notice. ©2009 Eiki International, Inc. Issued January 9, 2009.

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688-2132. Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com

In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8. Tel: 800-563-3454, Fax: 800-567-4069, E-mail: canada@eiki.com

Visit our World Wide Web site: <http://www.eiki.com>