

LC-XIP2000

Ultrawide Interactive XGA LCD Projector

2000 ANSI Lumens

Interactive Presenter Features

- ▼ Interactive function permits real-time annotation of projected image.
- ▼ Pen & pointer function as both writing instruments & computer mouse.
- ▼ Included software for advanced functionality, including screen capture.


Ultrawide Projector Features

- ▼ Extremely Short Throw Lens: as close as a 1:1 Throw-to-Width Ratio
- ▼ 2000 ANSI Lumens, 85% uniformity, and 400:1 contrast ratio.
- ▼ Weighs less than 8 lbs! Compact, low-profile design!
- ▼ 3 panel LCD imaging delivers a rich, color saturated picture.
- ▼ XGA resolution. SXGA-VGA compatible.
- ▼ Smart data compression/expansion, and video scaling.
- ▼ Two HD15 computer inputs, plus one HD15 computer monitor output.
- ▼ Preset image offset. Automatic vertical digital keystone correction.
- ▼ Auto Ceiling adjustment. Auto Brightness adjustment.
- ▼ Accepts Composite, S, and Component Video in all major standards.
- ▼ Displays both 4:3 and 16:9 formats. Supports most HDTV resolutions.
- ▼ Wireless remote control w/Laser. 4X digital zoom. Auto input search.
- ▼ 3 Year* Projector Warranty!



LC-XIP2000

2000 ANSI lumens

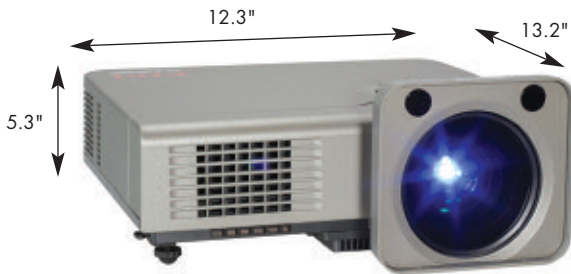

Input Panel



Wireless Remote Control



Pen & Pointer

INCLUDED ACCESSORIES:

Quick Start Guide. Owner's Manual on CD-ROM. AC Power Cord. Computer Input Cable (HD15~HD15). S-Video Input Cable (S-Video~S-Video) Composite Video Input Cable (RCA~RCA) Audio Input Cable (2RCA~Mini Stereo) USB Mouse Cable (USB-A~USB-B) Wireless Remote Control w/Laser Pointer & Batteries (AAA x 2).

OPTIONAL ACCESSORIES:

Replacement Lamp. Carry Bag. Component Video Input Cable (HD15~3-RCA). RS-232C Input Cable (DB9~Mini DIN-8). 15' (5M) USB Extension Cable and AC Adapter, Ceiling Mount. Ceiling Post and Plate. EZ-250 Local Control. NPC-1 Network Control.

Interactive Presenter: Minimum Computer Requirements

Computer: PC only (Interactive Presenter not available for MAC)
OS: Win 2 K SP4 or Win XP SP2+ and Direct X 9.0
Computer CPU: Intel Pentium IV
System RAM: 256 Mb
Available HD capacity: 30 MB
Other: CD-ROM, USB-B ver: 2.0

Interactive Presenter: Specifications

Included Accessories: Bag including Pointer, Pen, AA Batteries x 4
Optional Accessories: 15' (5M) USB Extension Cable and AC Adapter

Interactive Presenter: Operating Range

Image Diagonal: Interactive Projection 50~150 in. (127~381 cm)
Image Width: Interactive Projection 3.3~10 ft. (1.02~3.1 m)
Throw Distance (tele-wide): 2.6~19.8 ft. (.08~6.0 m)




Specifications subject to change without notice.
©2007 Eiki International, Inc. Printed in the USA. 07/15/07

SPECIFICATIONS: LC-XIP2000

Brightness	up to 2000 ANSI Lumens
Illumination Uniformity	85%
Size of Color Palette	16.7 Million
Contrast Ratio	400:1 (Full ON/OFF)
Projection Lamp	205 Watt NSH
Estimated Lamp Life	up to 2000 Hours of Use
Imaging System	0.63" PolySilicon active matrix TFT Panels x 3
Screen Pixels	1024 x 768 in stripe configuration
Total Pixels	2,359,296 ((1024 x 768) x 3)
Lens Type	Manual Zoom and Focus
Lens Specs	Speed: f:1.6~1.88; FL: 0.51~0.61 in. (13.0~15.62 mm)
Lens Ratios	Zoom Max:Min: 1.2:1; Throw:Width: 1.0~1.2:1
Image Diagonal: Normal Projection	40~300 in. (101.6~762 cm)
Image Width: Normal Projection	2.7~20 ft. (0.81~6.1 m)
Throw Distance (tele-wide)	2.6~19.8 ft. (0.79~6.04 m)
Front Elevation	Up to 14° Up
Anti Keystone	Fixed Image Offset, Ratio (Top:Bottom) 6.5:1
Vertical Keystone Correction	Digital: up to 30° up or down
Scanning Frequency	Auto: H Sync. 15-69kHz; V Sync. 43-85Hz
Dot Clock	110 MHz
Image Orientation	Normal, Reversed, Inverted
Remote Projector Control	Wireless (Infra Red) x 1
RS-232C Control Port	Mini DIN 8 Pin x 1
Computer Native Resolution	1024 x 768 (XGA)
Computer: Compatibility	SXGA, XGA, SVGA, VGA
Computer: Formats	1280x1024 through 640x480
Computer: Higher Resolutions	Displayed panned or Smart Compressed
Computer: Lower Resolutions	Displayed normal or Smart Expanded
Video Compatibility	NTSC/PAL/SECAM/NTSC 4.43/PAL-M&N
Video HD Compatibility	480i/p, 575i/p, 720p, 1035i, 1080i
Formats Supported	Normal 4:3 and Wide Screen 16:9
Video: Image Sizing	Video Scaling Technology
Signal Inputs	
Computer 1	HD15 x 1
Computer 2/Component Video (w/optional adapter):	HD15 x 1
S-Video	S-Video x 1
Composite Video	RCA x 1
Audio:	MiniStereo x 1
Outputs	
Computer Monitor:	HD15 x 1
Audio (Stereo) - Line:	MiniStereo x 1
Sound System - Amplifier:	2 Watts (Mono)
Sound System - Speaker:	1.6 x 1.2 in. (4x3 cm) x 1(Ellipse)
Fan Noise	as low as 41 dBA
Cabinet Size (HxWxD)	3.8 x 12.2 x 10.6 in. (96 x 310 x 270 mm)
Including lens and feet	5.3 x 12.3 x 13.2 in. (135 x 311 x 334 mm)
Weight	7.7 lb (3.5 kg)
Packaged Size (HxWxD)	9.9 x 17.7 x 13.8 in (250 x 450 x 350 mm)
Packaged Weight	13.7 lb (6.2 kg)
Power Requirements	100-240V AC, 50/60Hz
Power Consumption	Up to 250 Watts
Heat	up to 853 BTU (215 KC)
Power Cord	6' (1.8M) Type 3, Detachable
Safety Compliance	UL, cUL, IEC
Security Facilities	Kensington® Security Slot
Operating Temperature	41~95°F (5~35°C)
User Maintenance	Clean Air Filter, Replace Lamp
Warranty: (to the original end-use customer)	
Projector:	3 Years/6000 Hour Use*(Parts & Labor to Correct Defects)
Lamp:	90 Days (Failed Lamp Replaced Pro-Rata * Whichever occurs first

Talk to your Eiki Dealer... the "pro" in projectors.



Eiki International, Inc.

30251 Esperanza, Rancho Santa Margarita, CA 92688-2130
Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com
In Canada, 310 First St.-Unit 2, P.O. Box 156, Midland, ON L4R 4K8
Phone: 800-563-3454, Fax: 800-567-4069 E-mail: canada@eiki.com

<http://www.eiki.com>